


# WOOD LIGHTING STANDARDS



## C4773 LAMINATED WOOD LIGHTING STANDARD

Pole Length	Part No.	"X"	"Y"	"W"	"D"
15'-6"	<b>C4773.1A-1L</b>	3'-6"	12'-0"	4-1/4"	5-1/8"
19'-0"	<b>C4773.1B-1L</b>	4'-0"	15'-0"	4-1/4"	5-1/8"
24'-0"	<b>C4773.1C-1L</b>	4'-0"	20'-0"	5-1/8"	5-3/4"
30'-0"	<b>C4773.1D-1L</b>	5'-0"	25'-0"	5-1/8"	5-3/4"
18'-0"	<b>C4773.2A-1L</b>	4'-0"	14'-0"	4-1/4"	5-1/8"

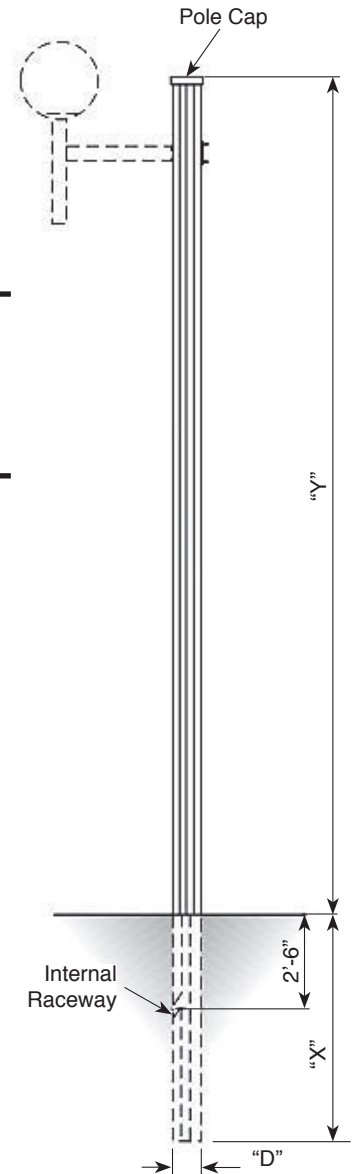

### SPECIFICATIONS:

- Open defects such as knot holes exceeding 1/2" in diameter or wane exceeding 1/4"x12" shall be filled with wood filler. Sides shall be S4S with edges eased to 3/8" radius.
- Tolerances shall be from +0 to -1/8" for width and ±1/4" in length.
- Lumber is coast region Douglas-Fir only, L1 laminating grade for strength & appearance.
- Each Standard shall be branded with a trademark 18" above intended ground line including month and year of manufacture.
- Luminaire hardware & pole caps are not included with the pole, many luminaire options can be accommodated.
- All lighting standards are penta treated.
- Internal raceway is 1" x 1-1/4" and runs the full length of the pole.

YOUR ENGINEERING CONTACT FOR HUGHES BROTHERS IS:

Larry Vandergriend  
 phone: 402-646-6212  
 e-mail: larry@hughesbros.com